


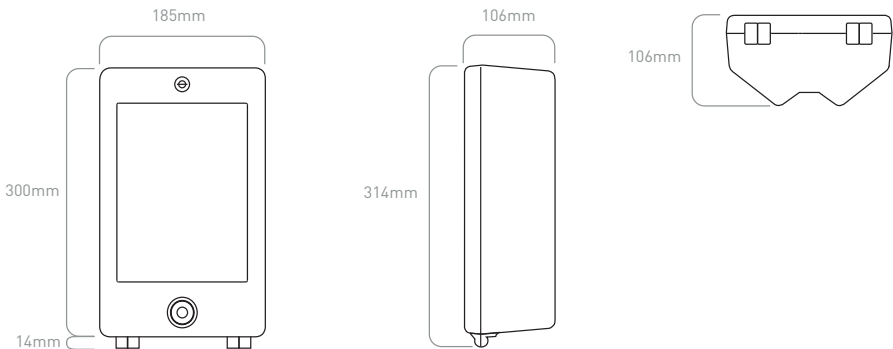

SPECIFICATIONS	
Technology	High intensity LED
Weight	2.2kg
Screen Impact Resistance	IK10 – BS EN50102 (single impact)
Housing Material	ADC 12 (High Pressure Aluminium Die Cast)
Paint Finish	Exterior Grade UV Resistant Polyester Powder Coat
Operating Temperature	-30°C to +60°C
Power Supply	48V ac
Current Drain	220mA Nominal
Dimming	20% of the nominal bright intensity
EMC Specification	EN50293
Fixing Centres	125mm

Owing to the Company’s policy of continuous improvement, AGD Systems Limited reserves the right to change their specification or design without notice. AGD products should be installed by a competent person.

PRODUCT VARIANTS	
924-000-000	LED Retro fit trial kit for WAIT push button unit / 48v
924-181-000	PIKE LED WAIT / 12v/ Dual legend
924-182-000	BERLEX LED WAIT 12v / Dual legend
924-680-000	LED WAIT / 48v / Dual legend / Moving push button / ELV+DCM
924-680-TRS	LED WAIT / 48v / Dual legend / Moving push button / ELV+DCM
924-681-000	LED WAIT / 48v / Welsh/English Dual legend / Moving push button / ELV+DCM
924-682-000	LED WAIT / 48v / Toucan legend / Moving push button / ELV+DCM
924-683-000	LED WAIT / 48v / Welsh/English Toucan legend / Moving push button / ELV+DCM
924-684-000	LED WAIT / 48v / Triple legend / Moving push button / ELV+DCM
924-685-OSL	LED WAIT / 48v / Triple legend Arabic/English Moving push button / ELV+DCM
924-690-000	LED WAIT / 48v/ Dual legend / Moving push button / ELV+DCM (Cubic)
924-691-000	LED WAIT / 48v / Toucan legend / Moving push button / ELV+DCM (Cubic)

APPLICATIONS

- Pedestrian control
- Pedestrian & cycle control

